

Unite Cockpit Case (CC)

Charger



Unite CC closed



Unite CC-24P



Unite CC-28/2



Unite CC-36P



Unite CC-36/2

APPLICATIONS

The Unite Cockpit Case is a multifunctional device. It charges the integrated batteries in Unite mobile transmitters and receivers, and stores and relays pairing information (channel name, group ID, audio key). For maximum protection against unauthorised listening, a group-ID-dependent audio code is generated in the charger and relayed to the mobile devices during the pairing process. The charger can be integrated into a network via the Ethernet port, and combined with other Unite Cockpit chargers and Unite AP4 Access Points. The Unite Manager PC software enables further functionality within the network: monitoring, maintenance, advanced configuration, pairing and set-up of transmitters, receivers and Unite AP4 Access Points.

FEATURES

Intelligent transport, charging and storage case including pairing and network functions.

- **Controls**
 - Buttons and status light for the pairing process
 - Switch for "Pairing & charging" or "Charging"
 - Reset button
- **Ethernet port for network integration**
- **USB connector**
 - Pairing
 - Charging
- **Additional options via Unite Manager PC software**
 - Advanced configuration
 - Pairing via several chargers
 - Customisable AES-256 encryption
 - Storing of pairing information
 - Monitoring
 - Maintenance
 - Device software updates
- **Detachable, lockable lid**
- **Ergonomic carrying handle**
- **Sturdy wood construction**
- **Laminated housing**
- **Reinforced aluminium frame**
- **Stackable housing corners**
- **Sideward adjustable feet**
- **Integrated power adapter with switchable, fused IEC mains connection**
- **Active ventilator**

Unite Cockpit Case (CC)

Charger

TECHNICAL SPECIFICATIONS

AC input 100-240 V AC, 50-60 Hz
Fuse..... 2 x 3.15 A (slow-blow)
Nominal current..... 2.2 A @115 V AC
1.1 A @ 230 V
Power consumption..... 150 W for 24 charging slots
225 W for 36 charging slots
Max. charging time approx. 4 hours
Connections Ethernet
USB, type C
power plug with switch

Ambient temperature
· 0 - 30 °C optimum operation (the listed charging times were obtained within this range)
· Charging time longer at 30°C and above (sustained operation is not recommended)
· Operation is not possible at 40°C and above
· Storage: -20 to +50°C

Relative humidity 0-90%
Dimensions incl. handle and feet (L x W x H)..... 12.6 kg
Weight
Version Unite CC-24P 12.6 kg
Version Unite CC-28/2 12.7 kg
Version Unite CC-36P 13.0 kg
Version Unite CC-36/2 13.0 kg

VERSIONS

incl. USB, network connection and integrated power adapter

Versions	Charging slots for pocket devices	Combination charging slots for handheld transmitters or pocket devices*	Order #
Unite CC-24P	24	-	713.074
Unite CC-36P	36	-	728.306
Unite CC-28/2	28	2	718.610
Unite CC-36/2	36	2	718.343

*The number of charging slots for pocket devices is reduced when charging handheld transmitters.

ACCESSORIES INCLUDED IN DELIVERY

- Power cable
- Lid key
- Quick Start Guide

OPTIONAL ACCESSORIES


Unite CC Bag storage bag for optional accessories. Order # 713.066



Unite Cockpit Case (CC)

Charger

DIMENSIONS

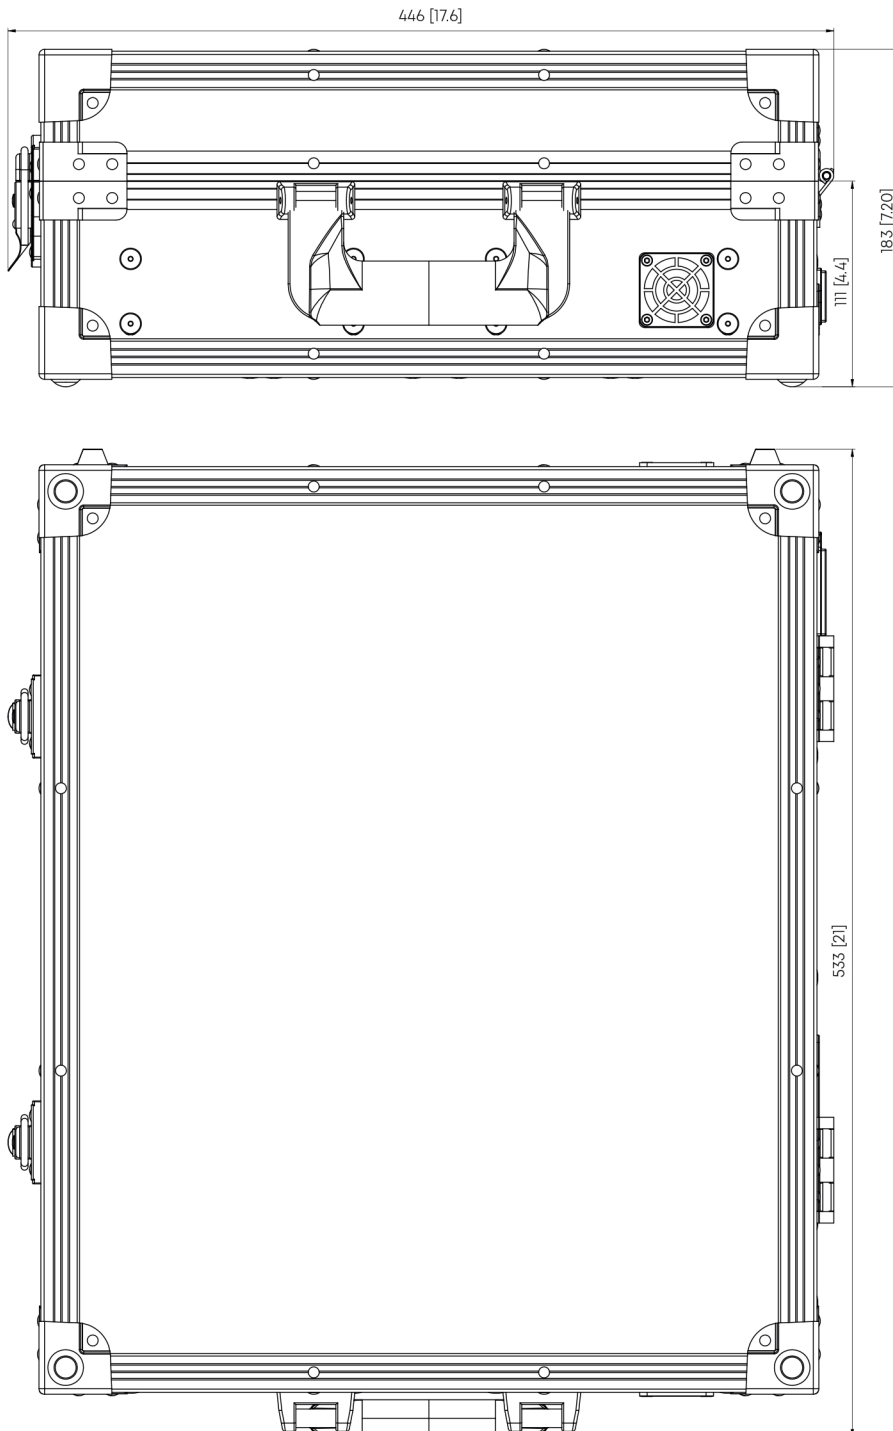

All dimensions in mm and [inches].

3 of 3

beyerdynamic GmbH & Co. KG
Theresienstr. 8 · 74072 Heilbronn – Germany
Tel. +49 (0) 71 31 / 617 - 300 · info@beyerdynamic.de · www.beyerdynamic.com

For further distributors worldwide, please go to www.beyerdynamic.com
Non-contractual illustrations. Contents subject to change without notice. E4 / Unite CC (07.20)

beyerdynamic